

SOLID STATE RELAY


MAXIMUM LOAD CURRENT 1.5 A / 2

SE SERIES

RoHS compliant

■ FEATURES

- Conforms to UL, CSA standards
- Ultra slim and light weight, SIL terminals type
 - —Size: 5.0 (W) \times 20.0 (L) \times 17.0 (H)mm
 - -Weight: approximately 4.0 g
- High reliability, long life and maintenance free
- High isolation (between input and output)
 - —Dielectric strength: 2,500 Vrms
- Internal zero cross circuit type available
- RoHS compliant since date code: 6522
 Please see page 5 for more information

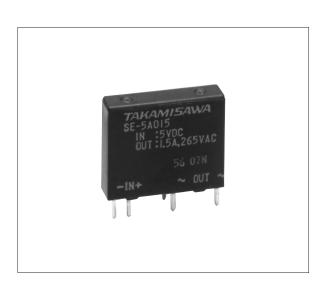

ORDERING INFORMATION

 $[Example] \qquad \frac{SE}{(a)} \ -\frac{12}{(b)} \ \frac{A}{(c)} \ \frac{O2}{(d)} \ \frac{V}{(e)} \ \frac{F}{(f)}$

(a)	Series Name	SE : SE Series
(b)	Nominal Voltage (Input side)	3: 3 VDC 5: 5 VDC 12: 12 VDC 24: 24 VDC
(c)	Load Voltage	A : AC type
(d)	Load Current	015 : 1.5 A 02 : 2.0 A
(e)	Output Protection	Nil: No varistor V : Varistor type (2.0A type only)
(f)	Zero Cross Circuit	F: No zero cross type C: Zero cross type

1

SE SERIES

■ SPECIFICATIONS

			AC 1.5 A		AC 2.0 A		
ltem		no zero cross	zero cross	no zero cross	zero cross	Remarks	
INPUT	Nominal Voltage (DC)		3 V, 5 V, 12 V, 24 V				
side	Operate Range		±20% of nominal voltage				
	Must Operate Voltage		80% of nominal voltage				
	Must Release Voltage		Minimum 1 VDC				
	Input Impedance	3 VDC Type	130Ω	180Ω	130Ω	180Ω	±10%
		5 VDC Type	330Ω	470Ω	330Ω	470Ω	±10%
		12 VDC Type	1.0 kΩ	1.5 kΩ	1.0 kΩ	1.5 kΩ	±10%
		24 VDC Type	2.2 kΩ	3.0 kΩ	2.2 kΩ	3.0 kΩ	±10%
OUTPUT	Load Voltage Range		AC 24 to 265V rns				
side	Maximum Load Current		1.5 Arms		2.0 Arms		see CHARACTERISTIC DATA
	Minimum Load Current		10 mArms				
	1 Cycle Surge Current		50 A (60 Hz 1 cycle)				
	Max. Off-State Leakage Current		0.5 mA rms 1.0 mA rms		1.0 mA rms 2.0 mA rms		(at 100 V rms 60 Hz) (at 200 V rms 60 Hz)
	Max. On-State Voltage Drop		1.2 V rms		1.3 V rms		at maximum load current
Maximum O	perate Time		1 ms	1/2 cycle + max.1 ms	1 ms	1/2 cycle + max.1 ms	
Maximum Release Time			1/2 cycle +1ms max.				
Insulation Resistance			Minimum 1,000 MΩ (at 500 VDC)				for input-output
Dielectric Strength			2,500 Vrms 1 minute				for input-output
Operating Temperature Range			-30°C to + 85°C				
Storage Temperature Range			-40°C to +100°C				
Case Color	Case Color			Black			
Weight		Approxima	itely 3.5 g	5.1 g			


■ BLOCK DIAGRAM

LOAD		INSULATIONCIRCUITS	Input/Output waveform (resistive load)
AC	Photo-triac coupler		Source voltage of load Input signal OFF Load current


^{*:} only 2A type had varistor

CHARACTERISTIC DATA


SE-()A015 type (1.5 A type)





SE-()A02 type (2.0A type)

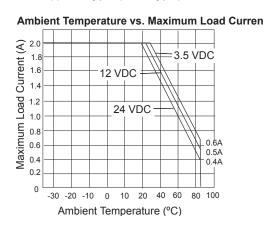



■ REFERENCE DATA















SE SERIES

■ DIMENSIONS

Dimensions

SE- () A015 type



Schematics(BOTTOM VIEW)




PC board mounting hole layout

(BOTTOM VIEW)




Unit: mm










■ NOTES

When large noise and surge are impressed on the load side, there is the possibility of the occurence of malfunction or damage. In such a case, a varistor should be inserted in the circuit.

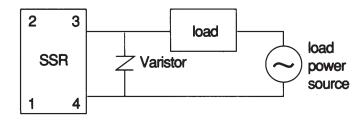

RoHS Compliance and Lead Free Relay Information

1. General Information

- Relays produced after the specific date code that is indicated on each data sheet are lead-free
 now. Most of our signal and power relays are lead-free. Please refer to Lead-Free Status Info.
 (http://www.fujitsu.com/us/downloads/MICRO/fcai/relays/lead-free-letter.pdf)
- Lead free solder paste currently used in relays is Sn-3.0Ag-0.5Cu.
- All signal and most power relays also comply with RoHS. Please refer to individual data sheets. Relays that are RoHS compliant do not contain the 5 hazardous materials that are restricted by RoHS directive (lead, mercury, chromium IV, PBB, PBDE).
- It has been verified that using lead-free relays in leaded assembly process will not cause any problems (compatible).
- "LF" is marked on each outer and inner carton. (No marking on individual relays).
- To avoid leaded relays (for lead-free sample, etc.) please consult with area sales office.
- We will ship leaded relays as long as the leaded relay inventory exists.

Note: Cadmium was exempted from RoHS on October 21, 2005. (Amendment to Directive 2002/95/EC)

2. Recommended Lead Free Solder Profile

Recommended solder paste Sn-3.0Ag-0.5Cu.

Reflow Solder condtion

Flow Solder condtion:

Pre-heating: maximum 120°C dip within 5 sec. at 260°C soler bath

Solder by Soldering Iron:

Soldering Iron

Temperature: maximum 360°C Duration: maximum 3 sec.

We highly recommend that you confirm your actual solder conditions

3. Moisture Sensitivity

Moisture Sensitivity Level standard is not applicable to electromechanical realys.

4. Tin Whisker

 Dipped SnAgCu solder is known as low risk tin whisker. No considerable length whisker was found by our in house test.

5

Fujitsu Components International Headquarter Offices

Japan

Fujitsu Component Limited Gotanda-Chuo Building 3-5, Higashigotanda 2-chome, Shinagawa-ku Tokyo 141 8630, Japan Tel: (81-3) 5449-7010

Fax: (81-3) 5449-2626 Email: promothq@fcl.fujitsu.com Web: www.fcl.fujitsu.com

North and South America

Fujitsu Components America, Inc. 250 E. Caribbean Drive Sunnyvale, CA 94089 U.S.A. Tel: (1-408) 745-4900

Fax: (1-408) 745-4970

Email: components@us.fujitsu.com

Web: http://www.fujitsu.com/us/services/edevices/components/

Europe

Fujitsu Components Europe B.V.

Diamantlaan 25
2132 WV Hoofddorp
Netherlands
Tel: (31-23) 5560910
Fax: (31-23) 5560950
Email: info@fceu.fujitsu.com
Web: emea.fujitsu.com/components/

Asia Pacific

Fujitsu Components Asia Ltd. 102E Pasir Panjang Road #01-01 Citilink Warehouse Complex

Singapore 118529 Tel: (65) 6375-8560 Fax: (65) 6273-3021 Email: fcal@fcal.fujitsu.com

Web: http://www.fujitsu.com/sg/services/micro/components/

©2006 Fujitsu Components America, Inc. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

Fujitsu Components America or its affiliates do not warrant that the content of datasheet is error free. In a continuing effort to improve our products Fujitsu Components America, Inc. or its affiliates reserve the right to change specifications/datasheets without prior notice.

Rev. August 1/2006